

ARCHITECTURAL HARDWARE

Product Catalog

STARK



STARK

HARDWARE ARCHITECTURAL SOLUTIONS

Defining Excellence in Every Detail

Welcome to a world where uncompromising engineering meets refined architectural elegance.

STARK Hardware Architectural Solutions stands as a premier authority and a trusted provider of high-performance door hardware.

We do not merely manufacture hardware; we engineer integral components that define the character, security, and functionality of modern spaces.

CONTENTS

04.	Hinges
12.	Door Closers
15.	Lock Bodies
26.	Cylinders
30.	Handles
33.	Exit Devices
36.	Auxiliary



HINGES

Built Of Performance Engineered To Last

Hinges play a vital role in the overall performance and functionality of a door. They ensure smooth operation, structural stability, and long-lasting durability. Stark Full Mortise Hinges are engineered for superior door performance, ensuring smooth operation, structural stability, and long-term durability. With precision manufacturing in size, thickness, and hole placement, these hinges are suitable for both wood and metal doors. Hinges play a vital role in the overall performance and functionality of a door. They ensure smooth operation, structural stability, and long-lasting durability.


APPLICATION

- Suitable for commercial, residential, and Governments buildings doors
- Ideal for high-traffic areas requiring reliability and durability
- Metal & wooden doors

Stark hinges combine durability, safety and engineering excellence - making them the perfect choice for high-quality doors in residential, commercial, and Government projects.



UL-LISTED 2 BALL BEARING

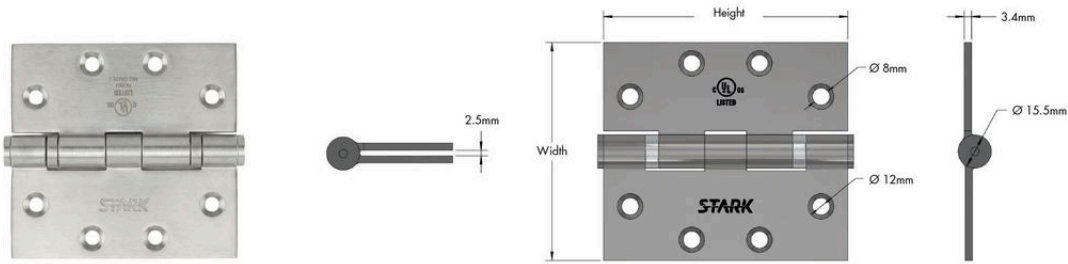

Features:

- Design: 5 Knuckles, 2 Ball Bearing
- Material: 304 Premium Stainless Steel
- Type: Full Mortise, Square Corners
- Pin: Fixed Pin (secure design)
- Max Load: Up To 120 KG

Standards & Compliance:

- UL 10C – Fire Rating 3 hours
- NFPA 80 – Fire Safety Compliance
- ANSI/BHMA A156.18 – Finishes Standard
- ANSI/BHMA A156.1 Grade 2 – Performance Standard


Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass

Sizes:

Height	4.5" (114 mm)	4.5" (114 mm)
Width	4.0" (102 mm)	4.5" (114 mm)
Thickness	3.4 mm	3.4 mm

UL-LISTED 4 BALL BEARING

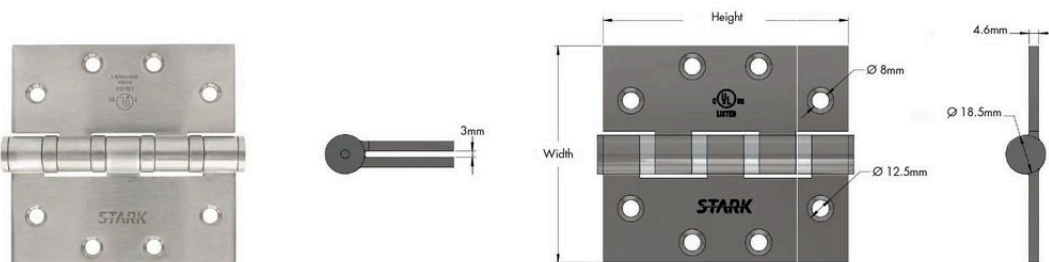

Features:

- Design: 5 Knuckles, 4 Ball Bearing
- Material: 304 Premium Stainless Steel
- Type: Full Mortise, Square Corners
- Pin: Non-Removable (for enhanced security)
- Max Load: Up To 120 KG

Standards & Compliance:

- UL 10C – Fire Rating 3 hours
- NFPA 80 – Fire Safety Compliance
- ANSI/BHMA A156.18 – Finishes Standard
- ANSI/BHMA A156.1 Grade 1 – Performance Standard


Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass

Sizes:

Height	4.5" (114 mm)	4.5" (114 mm)
Width	4.0" (102 mm)	4.5" (114 mm)
Thickness	4.6 mm	4.6 mm

BS-EN 2 BALL BEARING

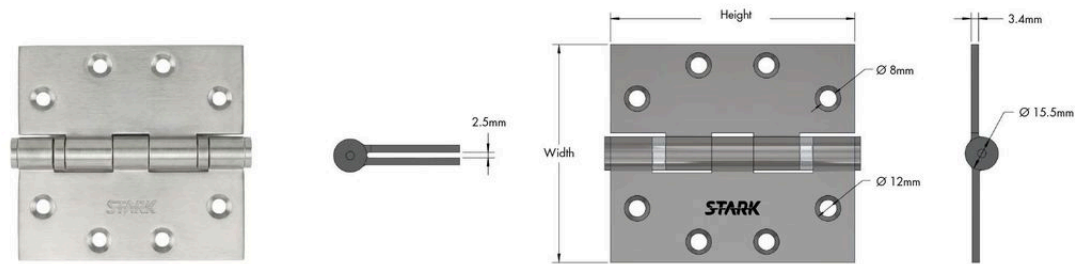

Features:

- Design: 5 Knuckles, 2 Ball Bearing
- Material: 304 Premium Stainless Steel
- Type: Full Mortise, Square Corners
- Pin: Fixed Pin (secure design)
- Max Load: Up To 120 KG

Standards & Compliance:

- EN-1634 – Fire Resistance
- EN-1935 – Performance
- Grade 13 – Performance Standard


Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass

Sizes:

Height	3.5 mm	4 mm	4 mm	4 mm	4.5 mm	4.5 mm	4.5 mm	4.5 mm
Width	3.5 mm	3 mm	3.5 mm	4 mm	4 mm	4.5 mm	4 mm	4.5 mm
Thickness	3 mm	3 mm	3 mm	3 mm	3 mm	3 mm	4 mm	4 mm

FULL MORTISE HINGE

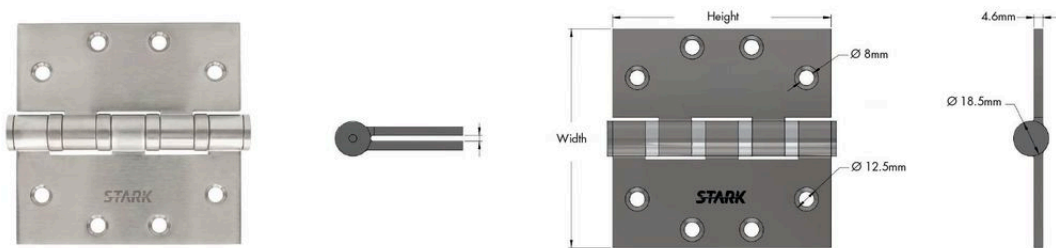

Features:

- Design: 5 Knuckles, 4 Ball Bearings
- Material: 304 Grade Premium Stainless Steel
- Type: Full Mortise, Square Corner
- Pin: Non-Removable (for enhanced security)
- Max Load: Up to 120 kg

Standards & Compliance:

- UL 10C – Fire Rating 3 hours
- NFPA 80 – Fire Safety Compliance
- ANSI/BHMA A156.18 – Finishes Standard
- ANSI/BHMA A156.1 Grade 1 – Performance Standard

Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass

Sizes:

Height	4.0" (102 mm)	4.5" (114 mm)	4.5" (114 mm)
Width	4.0" (102 mm)	4.0" (102 mm)	4.5" (114 mm)
Thickness	3.4 mm	3.4 mm	3.4 mm

FLUSH HINGE



- Features:**
- 2 ball bearing
 - 304 premium stainless steel

Sizes:

Height	Width	Thickness
(100 mm)	(70 mm)	3 mm

- Finishes:**
-  Matt Chrome
 -  Matt Black
 -  Satin Brass
 -  Matt Antique Brass

FLUSH HINGE




- Features:**
- 2 ball bearing
 - 304 premium stainless steel

Sizes:

Height	Width	Thickness
(100 mm)	(70 mm)	2.5 mm

- Finishes:**
-  Matt Chrome
 -  Matt Black
 -  Satin Brass
 -  Matt Antique Brass

3D ADJUSTABLE INVISIBLE HINGE

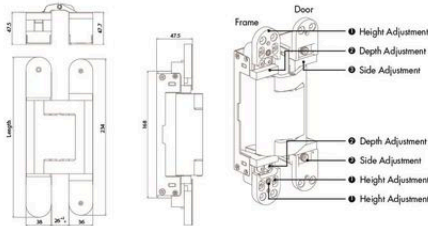

Features:

- Door: wood, casting, steel and aluminum frames
 - Min. door thickness: not less than 45mm
 - Opening angle: up to 180°
 - Handed: Non-handed design
 - Material: (SUS304)
 - Load Capacity: Up to 300 KG
 - Quantity for single door: 2pcs
- Note: the 3rd hinge increases loading capacity by 20%

Standards & Compliance:

- UL 10C – Fire Rating 3 hours

Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass


Adjustment:

Height	Side	Depth
±3mm	±3mm	±1mm

Sizes:

Height	Width	Thickness
240 mm	38 mm	47.5 mm

3D ADJUSTABLE INVISIBLE HINGE

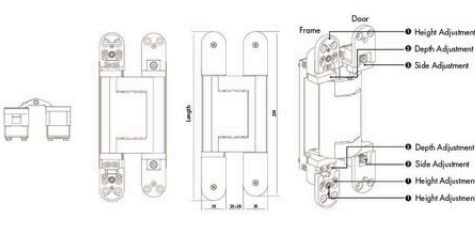

Features:

- Door: wood, casting, steel and aluminum frames
 - Min. door thickness: not less than 45mm
 - Opening angle: up to 180°
 - Handed: Non-handed design
 - Material: (SUS304)
 - Load Capacity: Up to 200 KG
 - Quantity for single door: 2pcs
- Note: the 3rd hinge increases loading capacity by 20%

Standards & Compliance:

- UL 10C – Fire Rating 3 hours

Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass


Adjustment:

Height	Side	Depth
±3mm	±3mm	±1.5mm

Sizes:

Height	Width	Thickness
240 mm	35 mm	47.5 mm

3D ADJUSTABLE INVISIBLE HINGE

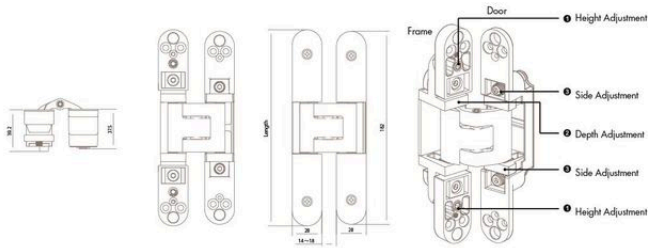

Features:

- Door: wood, casting, steel and aluminum frames
 - Min. door thickness: not less than 35mm
 - Opening angle: up to 180°
 - Handed: Non-handed design
 - Material: (SUS304)
 - Load Capacity: Up to 120 KG
 - Quantity for single door: 2pcs
- Note: the 3rd hinge increases loading capacity by 20%

Standards & Compliance:

- UL 10C – Fire Rating 3 hours

Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass



Adjustment:

Height	Side	Depth
±3mm	±3mm	±2mm

Sizes:

Height	Width	Thickness
185 mm	28 mm	39.2 mm

3D ADJUSTABLE INVISIBLE HINGE

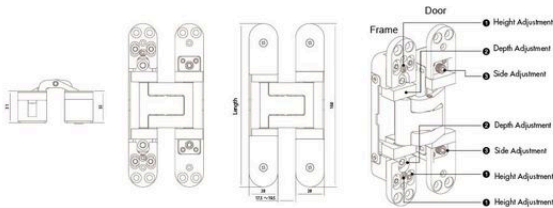

Features:

- Door: wood, casting, steel and aluminum frames
 - Min. door thickness: not less than 35mm
 - Opening angle: up to 180°
 - Handed: Non-handed design
 - Material: (SUS304)
 - Load Capacity: Up to 200 KG
 - Quantity for single door: 113 KG (Heavy Weight) / 147 KG (Double Weight)
- Note: the 3rd hinge increases loading capacity by 20%

Standards & Compliance:

- UL 10C – Fire Rating 3 hours
- ANSI/BHMA A156.1 – Double Weight 325LB (147KG), (200,000 cycles)
- ANSI/BHMA A156.1 – Heavy Weight 250LB (113KG), Grade 1 (1,000,000 cycles)

Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass


Adjustment:

Height	Side	Depth
±3mm	±3mm	±1mm

Sizes:

Height	Width	Thickness
160 mm	28 mm	31 mm

3D ADJUSTABLE INVISIBLE HINGE

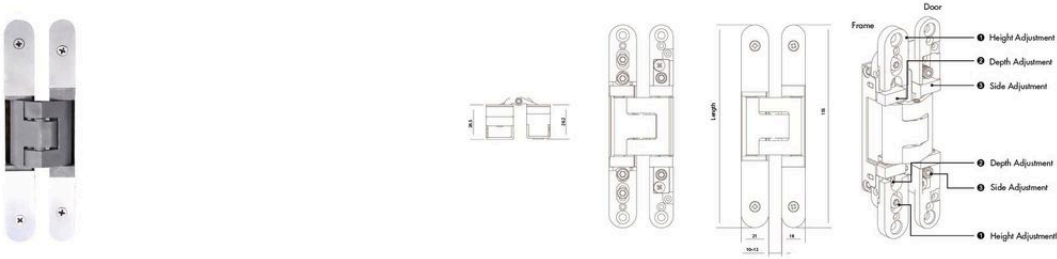

Features:

- Door: wood, casting, steel and aluminum frames
 - Min. door thickness: not less than 25mm
 - Opening angle: up to 180°
 - Handed: Non-handed design
 - Material: (SUS304)
 - Load Capacity:Up to 80 KG
 - Quantity for single door: 2pcs
- Note: the 3rd hinge increases loading capacity by 20%

Standards & Compliance:

- UL 10C – Fire Rating 3 hours

Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass


Adjustment:

Height	Side	Depth
±3mm	±3mm	±1mm

Sizes:

Height	Width	Thickness
155 mm	21 mm	26.5 mm

3D ADJUSTABLE INVISIBLE HINGE

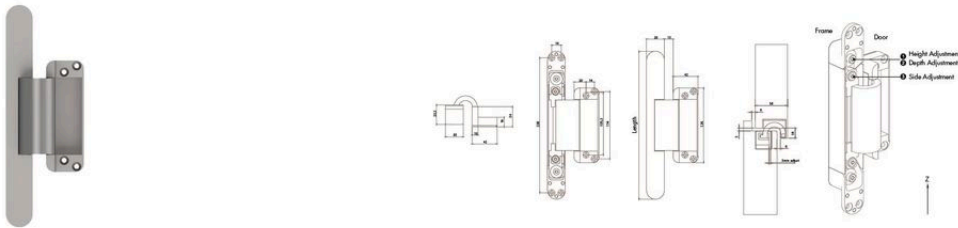

Features:

- Door: wood, casting, steel and aluminum frames
 - Min. door thickness: not less than 40mm
 - Opening angle: up to 180°
 - Handed: Non-handed design
 - Material: (SUS304)
 - Load Capacity:Up to 160 KG
 - Quantity for single door: 2pcs
- Note: the 3rd hinge increases loading capacity by 20%

Standards & Compliance:

- UN 1935: 2016

Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass


Adjustment:

Height	Side	Depth
±3mm	±1.5mm	±1.5mm

Sizes:

Height	Width	Thickness
228 mm	30 mm	34 mm

RECOGNIZED CONCEALED HINGE

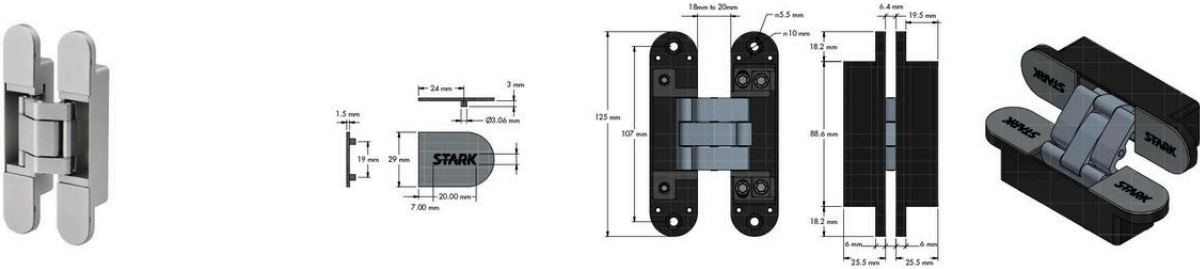

Features:

- Material: Zamak
- Minimum Door Thickness: 38mm
- Opening Angle: 180°
- Maximum Door Weight:
2 hinges: 60kg / 3 hinges: 80kg

Standards & Compliance:

- Load capacities specified for a door size of 926 × 2040mm; required hinge quantity determined by door dimensions and overall door weight — refer to load capacity tables

Finishes:

- Matt Chrome
- Matt Black
- Satin Brass
- Matt Antique Brass

Adjustment:

Depth	Side	Height
1.5 mm	±1mm	±2mm

STARK

DOOR CLOSER

Smooth control.. Reliable performance


Designed to deliver smooth, controlled, and reliable door operation, STARK Door Closers combine precision engineering with long-lasting performance. Suitable for commercial, institutional, and residential applications, they enhance safety, convenience, and door durability by ensuring consistent closing performance while minimizing impact, noise, and wear.

The Stark door closer is a premium-grade, concealed door closer designed for smooth, controlled door operation.

Suitable for both commercial and residential environments, it offers discreet installation, reliable performance, and long-term durability.



530 — SURFACE MOUNTED DOOR CLOSER




Features:

- Mechanism: Max door wight
- Rack & Pinion: 65 kg
- Material: Power size
- Aluminum: EN 3

Sizes:

Height	Width	Thickness
179 mm	42 mm	62.5 mm

5016BC — SURFACE MOUNTED DOOR CLOSER

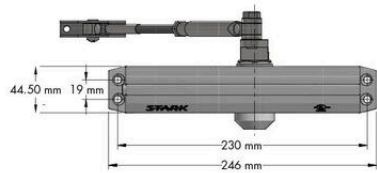


Features:

- Mechanism: Max door wight
- Rack & Pinion: 150 kg
- Material: Power size
- Aluminum: Adjustable EN 1-6

Sizes:

Height	Width	Thickness
246 mm	44.5 mm	69.5 mm

130 — CONCEALED DOOR CLOSER

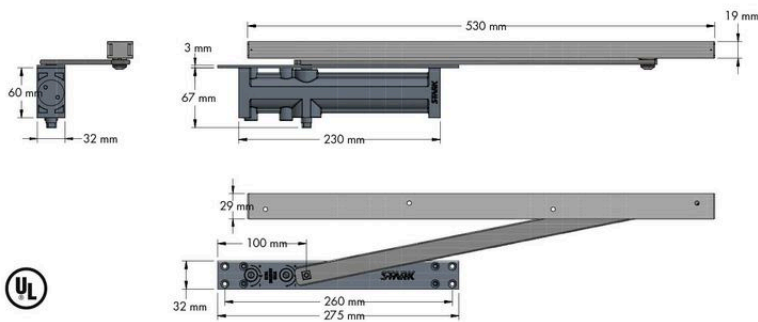


- Features:**
- Mechanism: Max door wight
 - Rack & Pinion: 65 kg
 - Material: Power size
 - Aluminum: Adjustable EN2-3

Sizes:

Height	Width	Thickness
530 mm	67 mm	60 mm

2025 BC SL — SURFACE MOUNTED DOOR CLOSRE SLIDE ARM

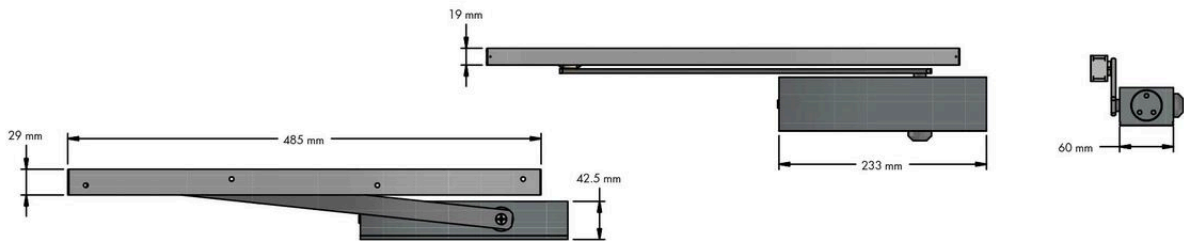

- Features:**
- Mechanism: Max door wight
 - Rack & Pinion: 80 kg
 - Material: Power size
 - Aluminum: Adjustable EN 1-4

Sizes:

Height	Width	Thickness
485 mm	29 mm	60 mm

STARK

LOCK BODY

Precision engineered.. Built for security

STARK door locks are manufactured to the highest standards of quality and functional reliability.

Crafted from premium materials & produced with advanced techniques under strict quality control, they meet demanding technical specifications and guarantee consistent performance with long-lasting durability.



SASH LOCK



Finishes:

- Satin SS
- Matte Black
- Bronze

Functions:

- Handle operate latch
- Cylinder operate latch & dead bolt

Material:

- Forend: 304 Stainless Steel
- Strike: 304 Stainless Steel
- Lock Case: SECC, 2.0 mm thickness

Standards & Compliance:

- EN 1634 – Fire Resistance
- EN 12209 – Mechanical Performance

Euro Profile cylinder:

Backset	55	60	65	70	80
Center to Center	72	72	72	72	72

SASH LOCK



Finishes:

- Satin SS
- Matte Black
- Bronze

Functions:

- Handle operate latch
- Cylinder operate latch & dead bolt

Material:

- Forend: 304 Stainless Steel
- Strike: 304 Stainless Steel
- Lock Case: SECC, 2.0 mm thickness

Standards & Compliance:

- UL 10C – Fire Rating 3 hours

Euro Profile cylinder:

Backset	55	60
Center to Center	72	72

DEAD BOLT LOCK



Finishes:

- Satin SS
- Matte Black
- Bronze

Functions:

- Only deadbolt function
- Cylinder operate deadbolt

Material:

- Forend: 304 Stainless Steel
- Strikel 304 Stainless Steel
- Lock Case: SECC, 2.0 mm thickness

Standards & Compliance:

- EN 1634 – Fire Resistance
- EN 12209 – Mechanical Performance

Euro Profile cylinder:

Backset	55	60
Center to Center	72	72

DEAD BOLT LOCK



Finishes:

- Satin SS
- Matte Black
- Bronze

Functions:

- Only deadbolt function
- Cylinder operate deadbolt

Material:

- Forend: 304 Stainless Steel
- Strikel 304 Stainless Steel
- Lock Case: SECC, 2.0 mm thickness

Standards & Compliance:

- UL 10C – Fire Rating 3 hours

Euro Profile cylinder:

Backset	55	60
Center to Center	72	72

LATCH LOCK - NO CYLINDER



Finishes:

- Satin SS
- Matte Black
- Bronze

Functions:

- Only Latch bolt
- Handle operate latch
- No cylinder

Material:

- Forend: 304 Stainless Steel
- Strike: 304 Stainless Steel
- Lock Case: SECC, 2.0 mm thickness

Standards & Compliance:

- EN 1634 – Fire Resistance
- EN 12209 – Mechanical Performance

Euro Profile cylinder:

Backset	55	60
Center to Center	72	72

LATCH LOCK - NO CYLINDER



Finishes:

- Satin SS
- Matte Black
- Bronze

Functions:

- Only Latch bolt
- Handle operate latch
- No cylinder

Material:

- Forend: 304 Stainless Steel
- Strike: 304 Stainless Steel
- Lock Case: SECC, 2.0 mm thickness

Standards & Compliance:

- UL 10C – Fire Rating 3 hours

Euro Profile cylinder:

Backset	55	60
Center to Center	72	72

LATCH LOCK - CYLINDER



Finishes:

- Satin SS
- Matte Black
- Bronze

Functions:

- Only Latch bolt
- Handle operate latch
- Cylinder operate latch

Material:

- Forend: 304 Stainless Steel
- Strike: 304 Stainless Steel
- Lock Case: SECC, 2.0 mm thickness

Standards & Compliance:

- EN 1634 – Fire Resistance
- EN 12209 – Mechanical Performance

Euro Profile cylinder:

Backset	55	60
Center to Center	72	72

DEAD BOLT LOCK



Finishes:

- Satin SS
- Matte Black

Technical Data:

Backset	45/55 mm
---------	----------

Forend:

Type	square head, round head
Thickness	3mm
Width	20mm,22mm,23mm,24mm

LATCH BOLT LOCK



Finishes:

- Satin SS
- Matte Black

Technical Data:

Follower	7mm,8mm,9mm
Backset	55 mm

Forend:

Type	round head, square head
Thickness	3mm
Width	20mm,22mm,23mm,24mm

BATHROOM LOCK



Finishes:

- Satin SS
- Matte Black

Technical Data:

Follower	Deadbolt follower	Distance	Bracket
7mm,8mm,9mm	5mm,8mm	78mm	55/60mm

Forend:

Type	square head, round head
Thickness	3mm
Width	20mm,22mm,23mm,24mm

ROLLER LOCK



Finishes:

- Satin SS
- Matte Black

Technical Data:

Distance	72mm
Bracket	40/45/50/55/60/65/70/80/100mm

Forend:

Type	round head, square head
Thickness	3mm
Width	20mm,22mm,23mm,24mm

SINGLE HOOK LOCK



Finishes:

- Satin SS
- Matte Black

Technical Data:

Bracket	50/60 mm
---------	----------

Forend:

Type	round head
Thickness	3mm
Width	20mm

STILE NARROW HOOK LOCK



Finishes:

-  Satin SS
-  Matte Black

Technical Data:

Bucket	20/30 mm
--------	----------

Forend:

Type	square head
Thickness	3mm
Width	24mm

STILE NARROW LOCK



Finishes:

-  Satin SS
-  Matte Black

Technical Data:

Follower	8mm
Distance	85mm
Bucket	25mm, 30mm

Forend:

Type	square head
Thickness	3mm
Width	22mm

MORTISE MAGNETIC LOCK



Finishes:

-  Satin SS
-  Matte Black

Technical Data:

Follower	7mm, 8mm, 9mm
Distance	72mm
Bucket	55/60mm

Forend:

Type	round head
Thickness	3mm
Width	20mm, 22mm, 23mm, 24mm

ANSI MORTISE LOCKS



Finishes:



630

Functions:

- Universal lock case - multiple functions in one case
- Field-reversible handing without opening lock case
- Independent lever rotation
- Locking thumbtum on the inside of door visually shows whether the door is locked or unlocked

Specification:

Lockcase	Heavy gauge steel, with zinc dichromate finish for corrosion resistance.
Deadbolt	One-piece stainless steel, 25mm throw.
Latchbolt	Stainless steel, 2 pieces mechanical with anti-friction insert, 19mm throw.
Auxiliary Latchbolt	stainless steel
Strike	stainless steel, ANSI straight lip standard 4-7/8" (124mm) X1-1/4" (32mm)
Door Thickness	1-3/4" (45mm) standard. Optional 1-3/8"(35mm), 2-1/2"(64mm)
Backset	2 3/4" (70mm)
Trims	CMH8800, CMH8801, CMH8802, CMH8803, ES1
Cylinders	ACY (28.6-50.8mm length), ACY (SFIC, 34.8, 38.1 mm length), master keyed system (MK - GGGMK) in options
Keys	2 operation key, 1 control key (for ACC)

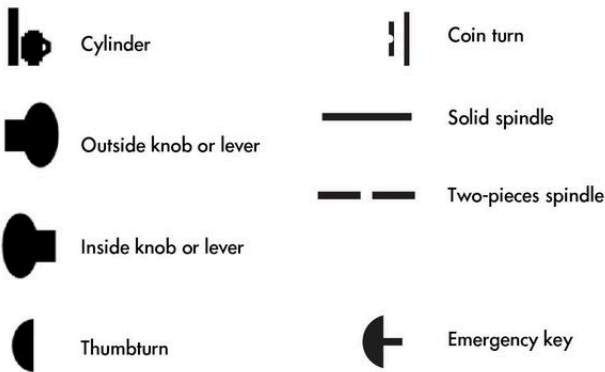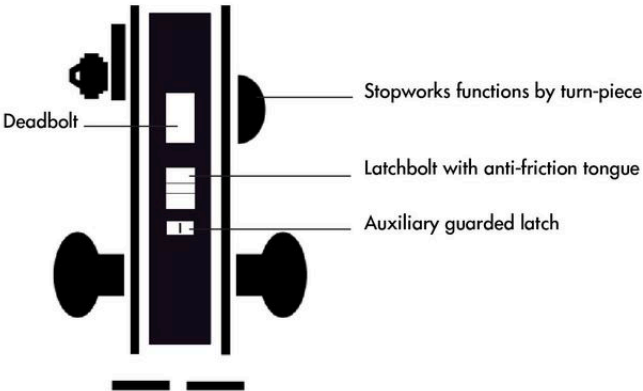

STARK | LOCK BODY

Outside Inside	Type	ANSI	Function Description
	Passage Lock	F01	Latch bolt operated by lever from either side at all times.
	Privacy, Bedroom or Bath Lock	F22	Latch bolt retracted by knob / lever from either side unless outside is locked by inside thumbturn or outside coin turn. Operating inside knob / lever, closing door, rotating inside thumbturn or rotating outside coin turn unlocks outside knob / lever. Inside knob / lever is always free for immediate egress.
	Privacy, Bedroom or Bath Lock	F22	Latch bolt retracted by knob / lever from either side unless outside is locked by inside thumbturn. Operating inside knob / lever, closing door, or operating outside emergency release unlocks outside knob / lever. Inside knob / lever is always free for immediate egress.
	Office and Inner Entry Lock	F04	Latch bolt operated by lever from either side except when outside lever is made inoperative by thumbturn or key. When outside lever is locked, latch bolt is retracted by key from outside or by operating inside lever. Auxiliary dead latch.
	Classroom Lock	F05	Latch bolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latch bolt is retracted by key, or by operating inside lever. Auxiliary dead latch.
	Storeroom Lock	F07	Latch bolt operated by key from outside or by operating inside lever. Outside lever is always inoperative. Auxiliary dead latch.
	Apartment Entrance Lock	F08	Latch bolt operated by lever from either side, except when outside lever is locked by key from inside. When outside lever is locked, latch bolt is retracted by key from outside or by operating inside lever. Auxiliary dead latch.
	Corridor Lock	F13	Latch bolt operated by lever from either side. Dead bolt projected by key from outside and turn from inside. Operating inside lever retracts both bolts and unlocks outside.
	Store/Utility with Deadbolt Room Lock	F14	Latch bolt operated by lever from either side. Dead bolt operated by key from either side.
	Dead Lock	F16	Dead bolt operated by key from either side.
	Dead Lock	F17	Dead bolt operated by key from outside and by turn from inside.

STARK | LOCK BODY

Outside Inside	Type	ANSI	Function Description
	Dead Lock	F18	Dead bolt operated by key from outside only.
	Privacy with Deadbolt and Coin Turn Outside	F19	Latchbolt retracted by knob/lever from either side. Deadbolt thrown or retracted by inside thumbturn or outside coin turn. Throwing deadbolt locks outside knob/lever. Rotating inside knob/lever simultaneously retracts deadbolt and latchbolt, and unlocks outside knob/lever. Rotating outside coin turn retracts deadbolt and unlocks outside knob/lever. Available with rose trim only. Inside lever is always free for immediate egress.
	Privacy with Deadbolt and CYLINDER Outside	F19	Latchbolt retracted by knob/lever from either side. Deadbolt thrown or retracted by inside thumbturn or outside CYLINDER. Throwing deadbolt locks outside knob/lever. Rotating inside knob/lever simultaneously retracts deadbolt and latchbolt, and unlocks outside knob/lever. Rotating outside CYLINDER retracts deadbolt and unlocks outside knob/lever. Available with rose trim only. Inside lever is always free for immediate egress.
	Entrance Lock	F20	Inside lever is always free for immediate egress. Auxiliary latch deadlocks latchbolt when door is closed. Throwing deadbolt automatically locks outside knob/lever. Locked until thumbturn is restored to vertical position, and latchbolt simultaneously. Outside knob/lever remains locked, key outside or knob/lever inside retracts deadbolt thrown or retracted by 90° rotation of thumbturn. When outside is locked by 20° rotation of thumbturn. Deadbolt Latchbolt retracted by knob/lever from either side unless
	Room Door Lock	F21	Latch bolt operated by lever from either side. Dead bolt operated by key from outside and turn from inside.
	Classroom Dead Lock	F29	Key from outside operates dead bolt. Turn from inside retracts but does not project dead bolt.
	Intruder Latch Bolt Lock	F32	Latch bolt operated by lever from either side except when outside lever is locked from inside or outside by key. When outside lever is locked, latch bolt is retracted by key from inside or outside or by operating inside lever. Auxiliary dead latch.
	Intruder Dead Bolt Lock	F33	Latch bolt operated by lever from either side except when outside lever is locked from inside or outside by key. Dead bolt retracted by key from inside or outside. Operating inside lever retracts both bolts and unlocks outside.
	Intruder Dead Bolt Lock	F34	Latch bolt operated by lever from either side except when outside lever is locked from inside or outside by key. Dead bolt retracted by key from inside or outside. Operating inside lever retracts both bolts and unlocks outside. Auxiliary dead latch or latch bolt dead locked when dead bolt is thrown.
	Exit or Communicating Lock	F31	Latch bolt operated by lever from inside. Non removable blank trim or no trim outside.

DEADBOLT LOCK



Finishes:

630

Outside Inside	Type	ANSI	Function Description
	Dead Lock	F16	Dead bolt operated by key from either side.
	Dead Lock	F17	Dead bolt operated by key from outside and by turn from inside.
	Dead Lock	F18	Dead bolt operated by key from outside only.
	Dead Lock Classroom	F29	Key from outside operates dead bolt. Turn from inside retracts but does not project dead bolt.

MORTISE LOCK SET FOR SLIDING DOORS



Finishes:

630

Functions:

- Self-retracting hook with non-marring latch bolt
- Stainless steel 304 deadbolt with 1" (25.4 mm) throw
- Stainless steel face plate.

STARK

CYLINDERS

Advanced security.. Reliable operation

The Stark Cylinder is engineered for secure and reliable performance. With solid brass construction, smooth operation, and long-term durability, it ensures dependable protection for both residential and commercial doors.



CYL-001

Features:

Description	Euro profile double cylinder (Key/key)
Keyway	C profile with 3 keys
Material	Brass
Size	70 – 100 mm

Finishes:

-  Satin Nickel
-  Matte Black



CYL-002

Features:

Description	Euro profile double cylinder (Key/key)
Keyway	5 Computer keys
Material	Brass
Size	70 – 100 mm

Finishes:

-  Satin Nickel
-  Matte Black



CYL-003

Features:

Description	Euro profile double cylinder (Key/Thumb turn)
Keyway	C profile with 3 keys
Material	Brass
Size	70 – 100 mm

Finishes:

-  Satin Nickel
-  Matte Black



CYL-004

Features:

Description	Euro profile double cylinder (Thumb turn/Privacy)
Material	Brass
Size	70 – 100 mm

Finishes:

-  Satin Nickel
-  Matte Black



CYL-005

Features:

Description	Euro profile single cylinder (Key)
Keyway	C profile with 3 keys
Material	Brass
Size	45 mm

Finishes:

-  Satin Nickel
-  Matte Black



CYL-006

Features:

Description	Euro profile single cylinder (thumb turn)
Material	Brass
Size	45 mm

Finishes:

-  Satin Nickel
-  Matte Black



ACY

Features:

Material	stainless steel 304 head cover
Keyway	Schlage C
Keys	3

Sizes:

Length	Marks
1 1/8 – 28.6mm	5 pin No master key
1 1/4 – 31.7mm	6 pin master key available
1 3/8 – 34.9mm	6 pin master key available
1 1/2 – 38.1mm	6 pin master key available
1 5/8 – 41.3mm	6 pin master key available

Finishes:

SS 304



ACC

Features:

Material	stainless steel 304 head cover
Keyway	Schlage C
Keys	3

Features:

Housing	34.9mm length
Core	31.7mm length, 7 pin
Keys	2 operating keys and 1 control key

Finishes:

SS 304




STARK

DOOR HANDLES

Modern design.. Comfortable grip

STARK Handles are designed to combine refined architectural aesthetics with dependable everyday performance. With carefully considered forms, durable construction, and a range of contemporary finishes, the collection complements modern architectural environments while providing a comfortable and reliable user experience.

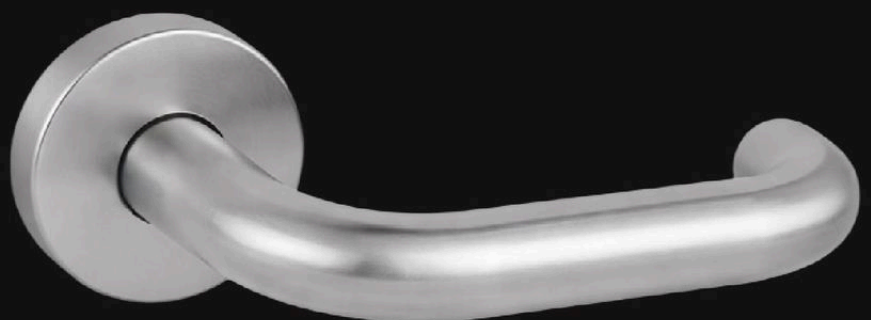

HOLLOW HANDLES



LH-001



LH-002



LH-003

Size:

Ø19×140 mm / Ø19×145 mm

Finishes:



Satin SS



Matte Black



LH-007



LH-008



LH-010



LH-012



LH-013

Size:

Ø19×145 mm

Finishes:



Satin SS

HOLLOW HANDLES



LH-014

Size:
Ø19×145 mm

Finishes:

■ Satin SS



LH-015

Size:
200×48 mm, C/C: 58mm



LH-16


Size:
139×50 mm, C/C: 58mm



LH-17


Size:
Ø19×135 mm

SOLID HANDLES




CODE

Size:
132×58.5 mm




CODE

Size:
130×49 mm



CODE

Size:
133×57 mm



CODE

Size:
129×51 mm

Finishes:

■ Satin SS

STARK

EXIT DEVICE

Fast response.. Trusted safety

STARK Exit Devices are engineered to provide dependable and intuitive emergency egress while maintaining a clean architectural appearance. Designed for doors requiring controlled exit functionality, the range combines practical operation with durable construction and professional architectural detailing.



F5000S



Features:


Description	Certification	Material
Rim Exit Device (Surface mounted)	UL Listed	304 Stainless steel

Finishes:

Satin SS



F5000VS



Features:


Description	Certification	Material
Vertical Rod Exit Device (Surface mounted)	UL Listed	304 Stainless steel

Finishes:

Satin SS



216S



Features:

Description	Certification	Material
Vertical Rod Exit Device (Surface mounted)	UL Listed	304 Stainless steel

Finishes:

Satin SS



211S



Features:

Description	Certification	Material
Rim Exit Device (Surface mounted)	UL Listed	304 Stainless steel

Finishes:

 Satin SS



017S



Features:

Description	Door thickness	Material
External Lever trim	55 mm	304 Stainless steel

Finishes:

 Satin SS

009S



Features:

Description	Door thickness	Material
External Lever trim	50 mm	304 Stainless steel

Finishes:

 Satin SS

STARK


AUXILIARY

Essential support.. Complete solutions


STARK Auxiliaries provide the essential finishing components required for a complete and professionally integrated door hardware solution. Designed to complement the main hardware range, these products combine functionality, durability, and architectural consistency across a wide variety of door applications.




FB-001 - MANUAL FLUSH BOLT

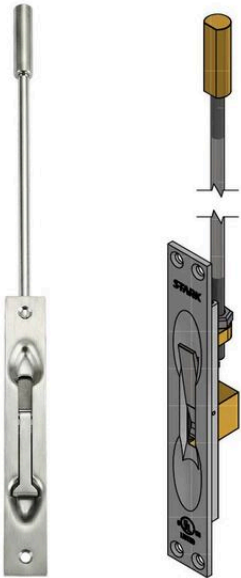


Rod extension: 12"
Material: Brass
Finishes:  Satin SS

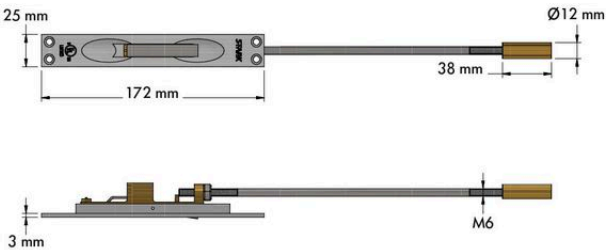

FB-002 - MANUAL FLUSH BOLT

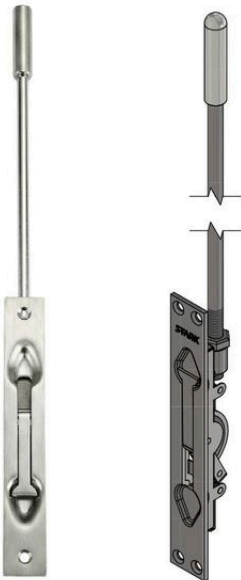

Rod extension: 12"
Material: Stainless steel
Finishes:  Satin SS

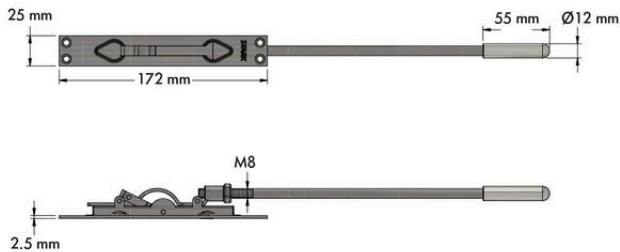

DP-001 - DUST PROOF SOCLET



Size:

Ø25×39 mm

Finishes:

 Satin SS

DP-002 - CYLINDRICAL DOOR STOPPER



Size:

73.5×35 mm

Finishes:

 Satin Nickel

DS-001 - HALF-DOME DOOR STOPPER



Size:

Ø45×25 mm

Finishes:

 Satin SS

DS-002 - CYLINDRICAL DOOR STOPPER



Size:

Ø30×40 mm

Finishes:

 Satin SS

DS-003 - CYLINDRICAL WALL DOOR STOPPER



Size:

Ø19×95 mm

Finishes:

 Satin SS

DS-004 - DOOR STOPPER



Size:

Ø46x34mm

Finishes:

 Satin SS

DS-005 - MAGNATIC DOOR STOPPER



Size:

Ø50X75mm

Finishes:

 Zinc Alloy

DS-006 - MAGNATIC DOOR STOPPER



Size:

Ø50X75mm

Finishes:

 Satin SS

DS-007 - DOOR STOPPER



Size:

Ø46X98mm

Finishes:

 Satin SS

DS-07 - DOOR STOPPER



Size:

16x94 mm

Finishes:

 Satin SS
 Matt Black

CH-018 - COAT HOOK



Finishes:

-  Satin SS
-  Matt Black

KB-154 - KNOBS



Size:

53.5x46x18 mm

Square stamping rose: 54x54x9.5mm,
steel inner rose with escutcheon

Finishes:

-  Satin SS
-  Matt Black

KB-155 - KNOBS



Size:

52x49x19 mm

Thread rose: dia.52x10mm
With escutcheon

Finishes:

-  Satin SS
-  Matt Black

KB-168 - KNOBS



Size:

50x73x19 mm

Thread rose: dia.52x10mm
With escutcheon

Finishes:

-  Satin SS
-  Matt Black

PH-001 - PUSH PULL HANDLE



Size:

100X400X1.5mm
Handle: 219XØ19mm
Plate: 0.5mm

Finishes:

-  Satin SS

PULL HANDLE - D SHAPE



Size:
300-3000mm

Finishes:
 Satin SS
 Matt Black

PULL HANDLE - H SHAPE



Size:
300-3000mm

Finishes:
 Satin SS
 Matt Black

LFH-001 - RECT FURNITURE HANDLES



Size:
150X50mm

Finishes:
 Satin SS

LFH-002 - ROUND FURNITURE HANDLES



Size:
120X40mm

Finishes:
 Satin SS

P-001 - DOOR SIGN - SQUARE FEMALE



Size:
100x100x1.5mm

Finishes:
 Satin SS

P-002 - DOOR SIGN - SQUARE MALE



Size:

100x100x1.5mm

Finishes:

 Satin SS

P-003 - DOOR SIGN - RECT FEMALE & MALE



Size:

170x130x1.5mm

Finishes:

 Satin SS

P-004 - DOOR SIGN - ROUND FEMALE



Size:

Ø76

Finishes:

 Satin SS

P-005 - DOOR SIGN - ROUND MALE



Size:

Ø76

Finishes:

 Satin SS

STARK

THANK YOU!

STARK | Precision Architectural Hardware